

**PRODUCT INFORMATION**

# Metal 1 Hour Fire Rated Slim Frame Access Panels - Picture Framed



1 hour fire robust mild steel access panels, independently tested by Exova Warringtonfire.  
 Ideal for gas safety industry's concealed boiler flue inspection requirements (1 hour fire rated applications).  
 Mineral wool insulation and draught stripped to reduce the opportunity of air leakage in application - meeting the highest levels of Building Regulation Part L.  
 32mm low profile frame for installation with 15mm plaster board.  
 Visible picture frame surround smartly conceals cut out edges and contributes to a faster installation.  
 Flush fitting door panels that can be fully removed for maximum access.  
 Hinged door panels with a square T-key lock mechanism.  
 Key lock available on request.

**Features across the range** | **Frequently used applications**

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• Excellent aesthetic appearance and finish                             <ul style="list-style-type: none"> <li>• Also allows for painting if required</li> </ul> </li> <li>• Quick and straight forward to install</li> <li>• Universal door handing</li> <li>• Available next working day</li> </ul> | <ul style="list-style-type: none"> <li>• Dry lined walls</li> <li>• Ceilings</li> <li>• Ducts</li> <li>• Units</li> </ul> |
|--|---|

**Specification**

<b>Fire rating:</b> 1 hour
<b>Acoustic Performance:</b> 33dB
<b>Airtight:</b> No
<b>Insulated and draft stripped:</b> Yes
<b>Insulation spec:</b> Mineral wool (45 kg/m <sup>3</sup> )
<b>Locking facility:</b> Yes
<b>Material:</b> Electro galvanised mild steel
<b>Closing mechanism:</b> Square T-Key Lock or Key Lock
<b>Colour:</b> White - RAL 9016
<b>Surface finish:</b> Polyester powder coated textured finish

**Helping to meet**

 <p><b>Concealed Flues in Voids</b></p>	 <p><b>Resistance to Sound</b></p>	 <p><b>Air Tightness</b></p>
--	---	---


Range			
Product Code	Frame Fitting Sizes	Clear Opening Sizes	Overall Dimensions
APC150x150CR	155mm x 155mm	110mm x 110mm	200mm x 200mm
APC150x230CR	155mm x 235mm	110mm x 190mm	200mm x 280mm
APC200x200CR	205mm x 205mm	160mm x 160mm	250mm x 250mm
APC300x300CR	305mm x 305mm	260mm x 260mm	350mm x 350mm
APC450x450CR	455mm x 455mm	410mm x 410mm	500mm x 500mm
APC550x550CR	555mm x 555mm	510mm x 510mm	600mm x 600mm
APC600x600CR	605mm x 605mm	560mm x 560mm	650mm x 650mm

### Frame detail


**Type:** Picture Frame

**Visible Width:** 25mm

**Depth:** 32mm

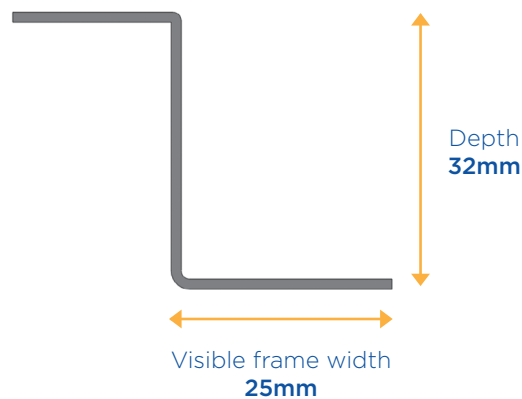

### Frame construction



### Bill of quantity / specification detail

#### L20 Doors/Shutters/Hatches

Clause

630^ HATCHES

- **Manufacturer:** Timloc Building Products, Rawcliffe Road, Goole, East Yorkshire, DN14 6UQ. Tel: 01405 765567, Fax: 01405 720479. Web: [www.timloc.co.uk](http://www.timloc.co.uk)
- **Product Reference:** Timloc Fire Rated Access Panels
- **Type:** Timloc Metal 1 Hour Fire Rated Slim Frame Access Panels - Picture Framed
- **Product Code:** (example APC300x300CR)
- **Frame Fitting Size:** (example 305 x 305mm)
- **Application:** (example Wall, Ceiling or Voids)
- **Frame Type:** Picture
- **Colour:** White - RAL 9016 Textured Polyester Powder Coating

### Care and maintenance

Clean using a soft cloth with a mild detergent.  
Spare keys are available.