

Brad type: F18 (18 Gauge) Straight Brads
Wire Ø: 1.20mm



Suitable for the following tools*:



Paslode FN1835.1, FN1850.1, FNS1850 IM50F18
haubold SKN30 JN/12, SKN40 I/12, SKN40 L-I/12, SKN50 L/12, SKN50 L-I/12
Duo-Fast FN4455, K4440A, K4440AGL
**please check staple length compatibility with each tool before use*
Brad lengths available: 15mm – 50mm
Brads per strip: 50

CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 1-2µm	INDOOR 	Blue
Stainless Steel A2 AISI 304 / WNr 1.4301	INDOOR, COVERED OUTDOOR & OUTDOOR 	Yellow
Stainless Steel A4 AISI 316 / WNr 1.4401	INDOOR, COVERED OUTDOOR & OUTDOOR 	Yellow

BRAD PROPERTIES / DIMENSIONS

Tensile strength of wire: min 950 N/mm²
Wire diameter (d): 1.20mm
Flattened wire dimension: (A): 1.00mm
(B): 1.25mm
Head height (D): 1.00mm
Head width (C): 1.90mm
Strip length (LP): 50 brads
Standard point: Diamond
Standard brad lengths (Lh): 15mm – 50mm

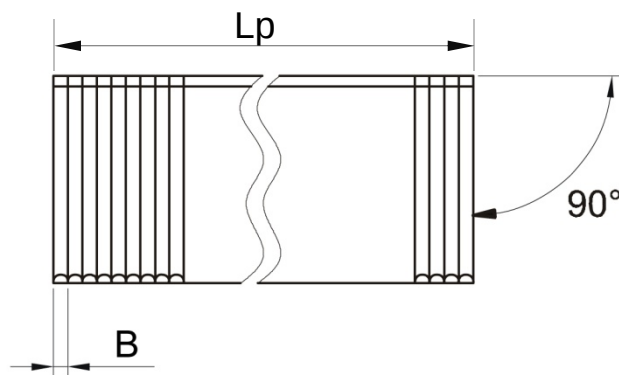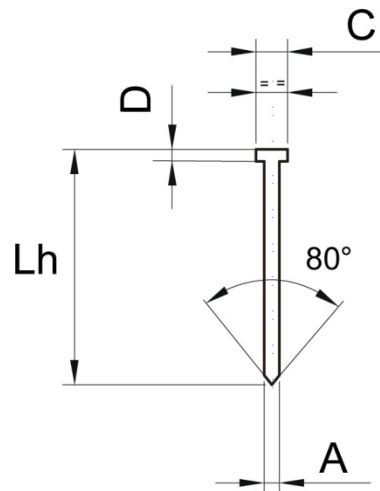

BRAD LENGTHS AVAILABLE*

Finish	Lengths Available *Other lengths on request
Zinc Galv 1-2µm	15mm, 16mm, 19mm, 25mm, 30mm, 32mm, 35mm, 38mm, 40mm, 45mm, 50mm
Stainless Steel A2 AISI 304 / WNr 1.4301	20mm, 25mm, 30mm, 35mm, 40mm
Stainless Steel A4 AISI 316 / WNr 1.4401	20mm, 25mm, 30mm, 35mm